



Early Journal Content on JSTOR, Free to Anyone in the World

This article is one of nearly 500,000 scholarly works digitized and made freely available to everyone in the world by JSTOR.

Known as the Early Journal Content, this set of works include research articles, news, letters, and other writings published in more than 200 of the oldest leading academic journals. The works date from the mid-seventeenth to the early twentieth centuries.

We encourage people to read and share the Early Journal Content openly and to tell others that this resource exists. People may post this content online or redistribute in any way for non-commercial purposes.


Read more about Early Journal Content at <http://about.jstor.org/participate-jstor/individuals/early-journal-content>.

JSTOR is a digital library of academic journals, books, and primary source objects. JSTOR helps people discover, use, and build upon a wide range of content through a powerful research and teaching platform, and preserves this content for future generations. JSTOR is part of ITHAKA, a not-for-profit organization that also includes Ithaka S+R and Portico. For more information about JSTOR, please contact support@jstor.org.

Hill Observatory, the United States Signal Office, Harvard College Observatory, the Institute of Technology, the Boston Water Works, and the Draper Manufacturing Company of New York. Owing to the generous response to the circular requesting the loan of articles, particularly by the United States Signal Service, the exhibition was a success, and was so well attended by visitors that it was continued three days longer than was originally intended. Now that the feasibility of such an exhibition has been demonstrated, it is to be hoped that others will follow, as there can be no doubt of their effect in stimulating the study of meteorology.

THE HORNIG DIRECT-POWER STEERING SYSTEM.

THE steering system herewith illustrated is the invention of Julius L. Hornig of Jersey City, N.J. It may be operated by steam, hydraulic, or pneumatic pressure, the last being preferable. The motor is attached directly to the rudder-head, as shown in the

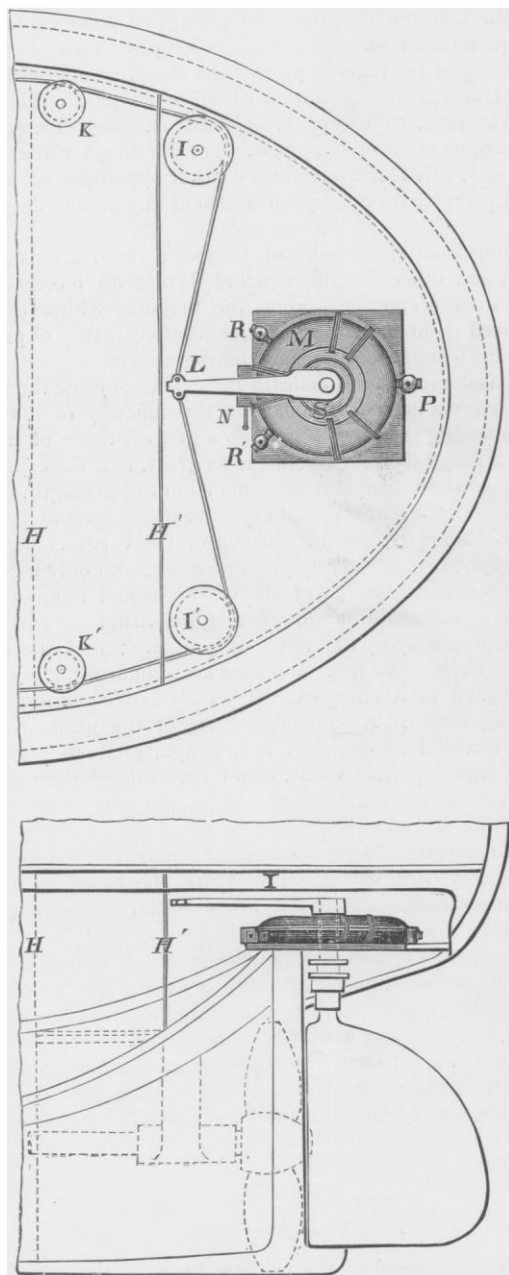


FIGS. 1. AND 2.

illustrations, though a special form of the motor is made which may be placed in any convenient part of the vessel, connecting with the rudder by chains, ropes, or rods.

The motor is shown at *M* in Figs. 1 and 2, the usual tiller, *L*,

not being removed, so that the vessel may be steered by hand if necessary. In fact, either hand or power steering may be done, or both at once, as neither system interferes with the other. *I* and *K* are guide-pulleys for the usual tiller-ropes. *R, R* are relief-cocks, and *P* is a regulator-cock for the brake.

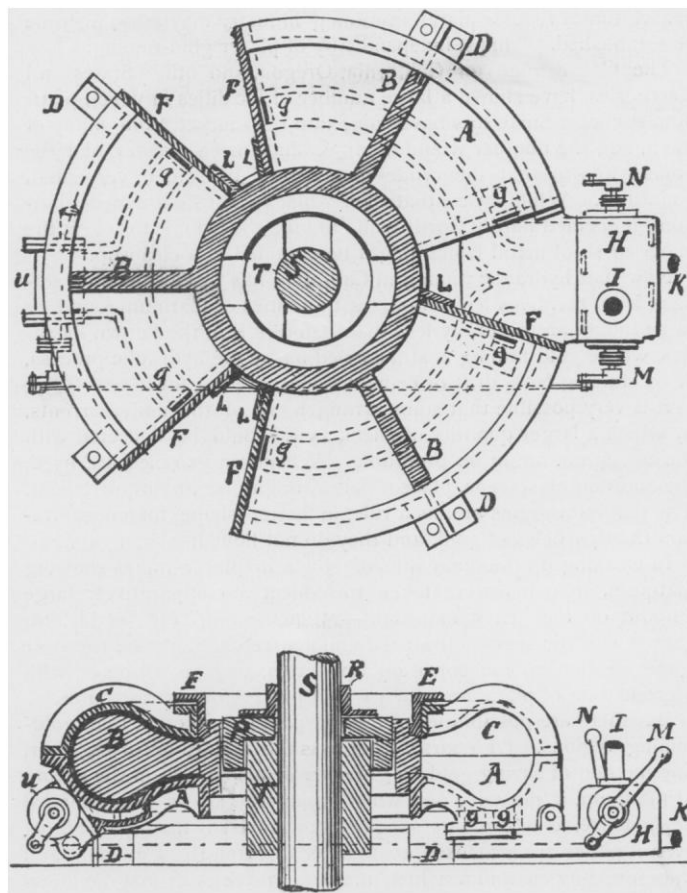

FIGS. 3 AND 4.

The motor has three pistons, working in an annular chamber, as shown in Figs. 3 and 4. *A* and *C* are the bottom and top cases of the chamber; *B*, the pistons; *D*, the legs by which the motor is secured to the deck; *g*, the ports; *H*, the valve-chest; *I*, the inlet-pipe; and *K*, the outlet-pipe. *M* is a lever for working the regulator-valve *U*, and *N* is the main valve-lever. *S* is the rudder-head; *T*, the motor hub; and *F*, the end covers or abutments.

The reason for preferring pneumatic pressure to operate the motor is that liquids have practically no elasticity, and may freeze, while steam will condense. Air, on the other hand, is subject to no change; and its elasticity makes it an excellent cushion to receive the shocks of wave-blows, thus relieving the mechanism from sudden strain. In 1886 two boards of naval experts, acting under government instructions, made trials of pneumatic steering-gear, and reported its superiority over other methods.

The pressure-valve, which is operated by the lever, as shown in the cut, regulates the action of the pistons by supplying pressure to one side while relieving that on the other, or *vice versa*; while the pistons and rudder will remain stationary when the valve is kept closed. The motor may be controlled from any part of the vessel by any of the usual mechanical methods or by electrical transmission.

PROFESSORS AYRTON and PERRY announce that Messrs. J. W. Queen & Co. of Philadelphia, Penn., are alone authorized to sell their electrical measuring instruments in the United States and in Mexico, and all instruments sent to America which have satisfactorily passed their tests will bear the firm's name on them as American agents, as well as being accompanied by a certificate of accuracy.